

## QuickNav Restoration moisture meter

The most complete moisture Meter for Building applications.  
An unique tool for the professional user.

**QuickNav**, Delmhorst's easy to use 3-in-1 meter, offers pin mode, scan mode, and thermo-hygrometer in a single handheld unit.

QuickNav offers the same high performance pin mode, scan mode, and thermo-hygrometer as our industry leading NavigatorPro, in an easier to use format. The QuickNav will instantly calculate dewpoint, grains per pound (GPP) and vapor pressure for fast, accurate moisture measurement.

If you are looking for the versatility of a 3-in-1 meter and do not need to store and download reading, QuickNav is the answer!



### Your benefits:

- Easy to use, fast & accurate
- Pin penetration depth of 8mm (5/16")
- Scan depth of 19mm (3/4")
- Correction scales for wood and drywall
- Moisture range of 6-60% on wood and 0.1-6% on drywall
- Scan range of 0-300 numerical reference scale
- RH Sensor conforms to ASTM-2170 standard for in-situ concrete testing
- RH Range of 0-100% RH
- Temp. Range of -40 - 124°C (-40 - 255°F)
- Dew point -40°C - 80°C (-40°F - 176°F)
- Grains Per Pound (GPP) 0.1 - 3820 GPP (0.1 - 545GPK)
- Backlit LCD screen
- Weight: 312gr. (11 oz.)
- Hold feature that allows to hold the displayed reading when testing hard to reach areas
- Rugged construction ensures years of reliable use
- Sturdy plastic carrying case
- 1-year warranty



## QuickNav Restoration moisture meter

### Scope of supply:


- QuickNav BP (Basic Package): Includes meter with RH/T sensor, 2-E electrode, and carrying case
- QuickNav FP (Full Package): Includes meter with RH/T sensor, 2-E electrode, 26-ES electrode, 21-E electrode and carrying case

### Optional - recommended electrodes



**26-ES**

The 26-ES has contact pins with insulated shanks. Only the tips are exposed. The pins make contact with the material only at their uncoated tip and provide much more accurate readings of moisture content at various levels of penetration. This feature allows you to penetrate through flooring to a concrete or plywood sub floor.

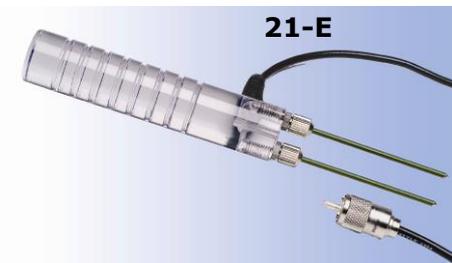

**21-E**

Features #608, 8cm (3 1/4") insulated pins for use on insulation or any tests where deeper penetration is required.



**2-E**

Uses the same contact pins that are mounted on each meter. This electrode is great to use in hard to reach places. Ideal for the home inspector and pest control operator.



**19-E/STC**

Two 12,5 cm (5") long blades, bent to a 35° angle. Teflon coated with exposed tips. Used to check behind trim and baseboard molding.

Other electrodes and accessories for specific applications available. We will be happy to advise with the selection of your electrodes